



PART NUMBER 40A-48A-XXY-XXY-14
 ITEM NAME DIODE LASER COMBINER; MM FIBER (405 NM, 488 NM)

PRODUCT DATASHEET



DESCRIPTION

A widely configurable 2-wavelength dichroic combiner featuring precisely co-aligned optical paths in a free-space output configuration. All optics and electronics fitted into the ultra compact 'Matchbox' housing. This particular configuration provides up to four wavelengths, which are standard for use in Life Sciences, Food, Metrology and Medical applications. An easy to use PC interface and separate TTL inputs allows full control over the individual wavelengths.

Features:

- Two wavelengths
- Plug-and-play
- Single user interface for all 2 lasers

Advantages:

- Space saving design
- No optics realignment
- Remote PC control

Applications:


- Wide field and Fluorescence Microscopy
- Flow cytometry
- Food sorting and quality
- Particle characterization

SPECIFICATIONS

Specifications updated: 1 October 2020

Parameter	Minimum Value	Typical Value	Maximum Value
Output power, mW	-	405 nm - 100 488 nm - 40	-
Wavelength Tolerance	-	+/-3 nm	-
Power stability, % (RMS, 8 hrs)	-	0.2	-
Longitudinal Modes	-	Multiple	-
Spectral line width FWHM, nm	-	<1.5	-
Transversal Mode	-	TEM00	-
Control Interface	-	UART ¹	-
Operation Mode	-	ACC (CW)	-
Input voltage, VDC	-	9	12
External Power Supply Requirement, V	-	+9 V DC, 1.5 A ²	+12 V DC, 1.5 A
External Power Supply Requirement	-	External Power Supply Requirement	-
Noise, % (RMS, 20 Hz to 20 MHz)	-	<1 ³	-
Dimensions, mm	-	50 x 30 x 18	-
Beam height from the base, mm	-	10.4	-
Heat-sinking requirement, °C/W	-	<0.5	-

DRAWING

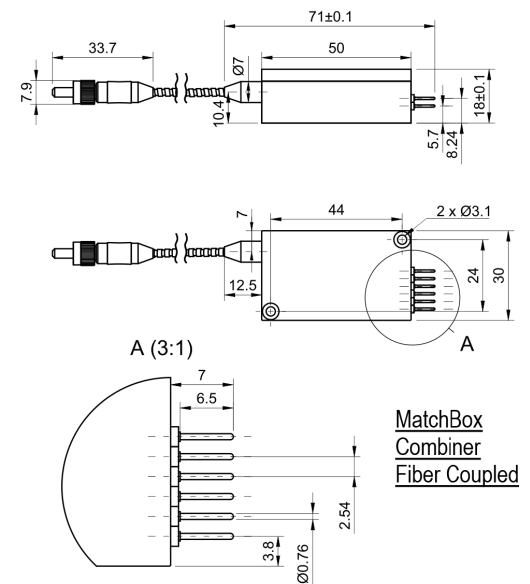

Optimum heatsink temperature, °C	-	20	-
Warm-up Time (Cold Start)	-	< 1 min	-
Temperature Stabilization	-	Internal TEC	-
Overheat Protection	-	Yes	-
Storage temperature, °C (non-condensing)	-	-	-
Net weight, kg	-	0.3	-
Max. power consumption, W	-	2	-
Warranty, months (op. hrs)	-	14 (10000) ⁴	-
RoHS	-	Yes	-
CE Compliance	-	- General Product Safety Directive (GPSD) 2001/95/EC - (EMC) Directive 2004/108/EC	-
OEM Lasers Are Not Compliant With	-	IEC60825-1:2014	-

¹ The break-out-box AM-C9 can be used for conversion of UART communication to USB.

² If the break-out-box AM-C9 is used, a PD (Power Delivery) type of power supply can be used.

³ Noise level is measured with a fast photodiode connected to an oscilloscope. The overall system bandwidth is from 2 kHz to 20 MHz.

⁴ Whichever occurs first.

Note: Product specifications are subject to change without prior notice to improve reliability, function or design or otherwise.